

1004 HP


11467 - TPS1005 EnCana CBM Unit	
DRIVER:	Caterpillar 3512AFRC
DRIVER SPEED:	1400 RPM
COMPRESSOR:	Frick TDSH 283S
SPEED INCREASER:	1:2.57
COMPRESSOR SPEED:	3598 RPM
PACKAGE RATED PRESSURE:	350psig @ 250F

PROCESS DESIGN		
Suct Temperature:	60	°F
Amb. Temperature:	90	°F
Altitude:	2500	feet
Gas Sp. Gr.:	0.6	
Gas K Value:	1.3	
Discharge pressure:	see graph	psig
Engine auxiliary power:	98	hp


Please consult Toromont for any special ratings outside these ranges.
All pressures shown are at skid edge, ---- INDICATES BACKPRESSURE CONTROL REQUIRED

FLOW CURVE

(flow rates guaranteed to +/- 5%)

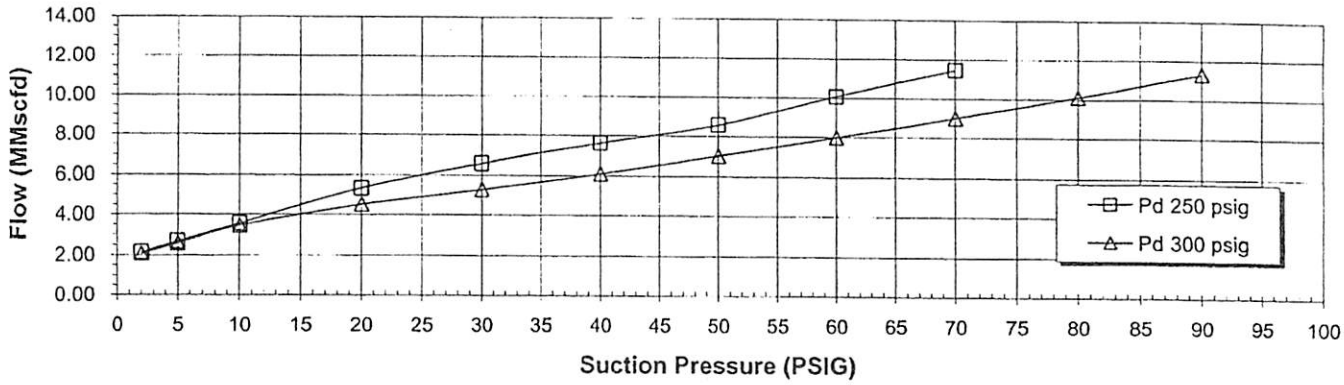

POWER CURVE

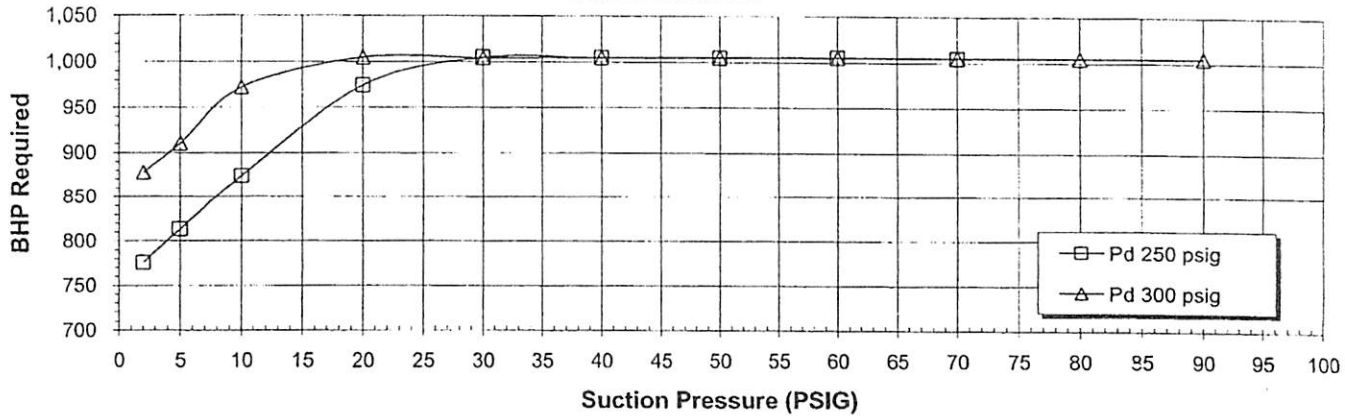

SLIDE VALVE POSITION

