

400HP



TPS400 Standard Booster Package


DRIVER:	Waukesha F18GL
DRIVER SPEED:	1800 rpm
COMPRESSOR:	Frick TDSH 283S
SPEED INCREASER:	N/A
COMPRESSOR SPEED:	1800 rpm
PACKAGE RATED PRESSURE:	375 psig @ 250°F

PROCESS DESIGN	
Suct Temperature:	60 °F
Amb. Temperature:	90 °F
Altitude:	2500 F
Gas Sp. Gr.:	0.6
Gas K Value:	1.3
Discharge pressure:	see gra
Engine auxiliary power:	20 HP


pressures shown are at skid edge

Please consult Toromont for any special ratings outside these ranges.

FLOW CURVE (flow rates guaranteed to +/- 5%)

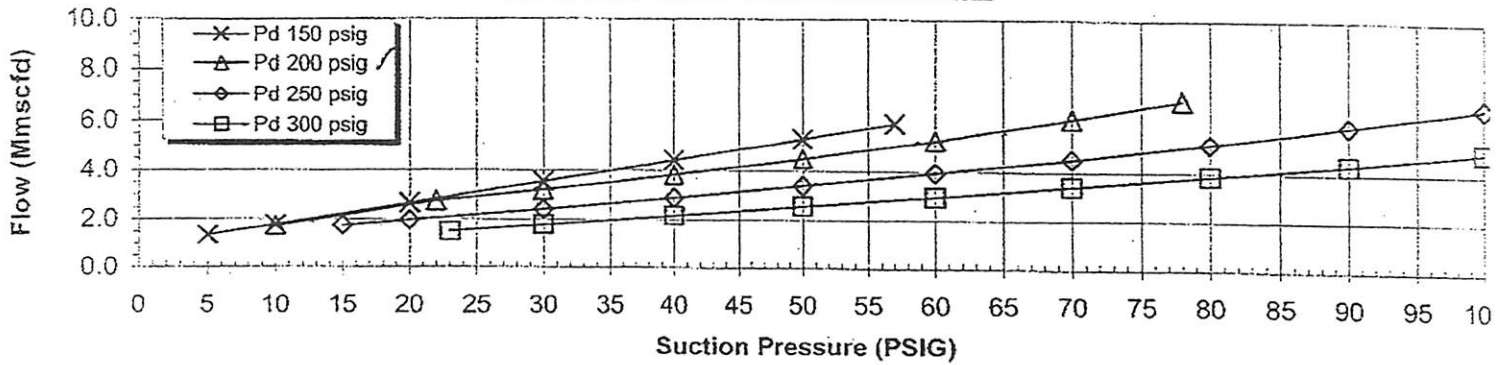

POWER CURVE

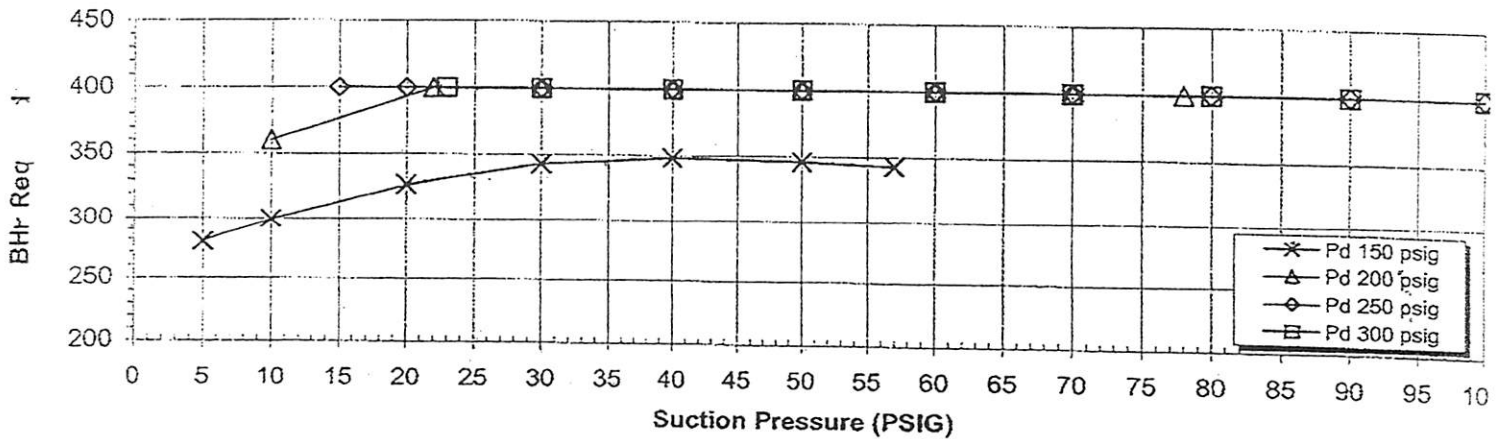

SLIDE VALVE POSITION

