

6-13-24-171

840
HP




ENCANA CORPORATION	
DRIVER:	Wauk 3524GSI
DRIVER SPEED:	1200 rpm
COMPRESSOR:	Frick TDSH 355S
SPEED INCREASER:	Pacific Rim 1:2.563
COMPRESSOR SPEED:	3076 rpm
PACKAGE RATED PRESSURE:	245 psig @ 250°F

PROCESS DESIGN	
Suct Temperature:	60 °F
Amb. Temperature:	100 °F
Altitude:	2500 FT
Gas Sp. Gr.:	0.596
Gas K Value:	-1.3
Discharge pressure:	see graph
Engine auxiliary power:	65 HP


pressures shown are at skid edge

Please consult Toromont for any special ratings outside these ranges.

FLOW CURVE (flow rates guaranteed to +/- 5%)

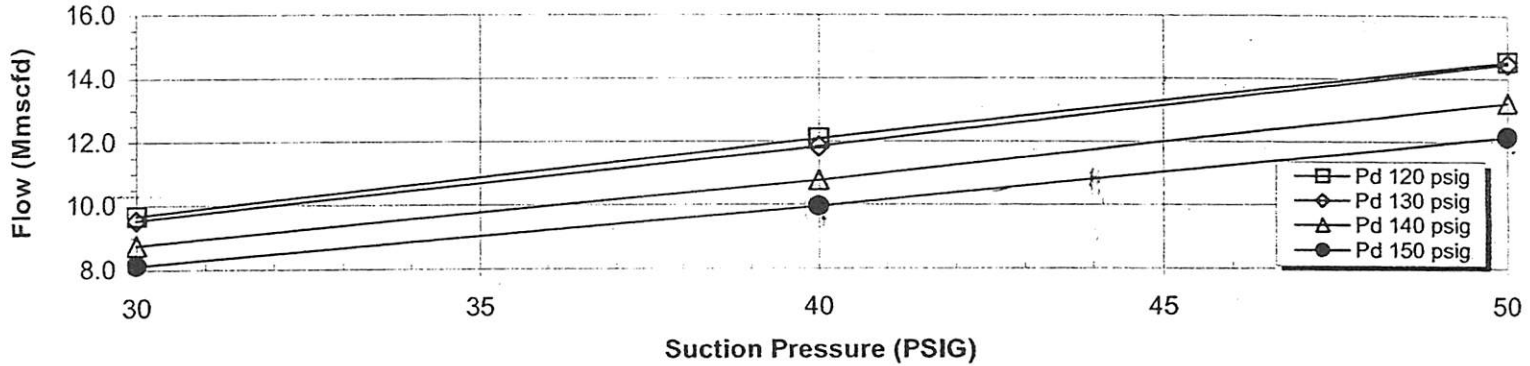

POWER CURVE

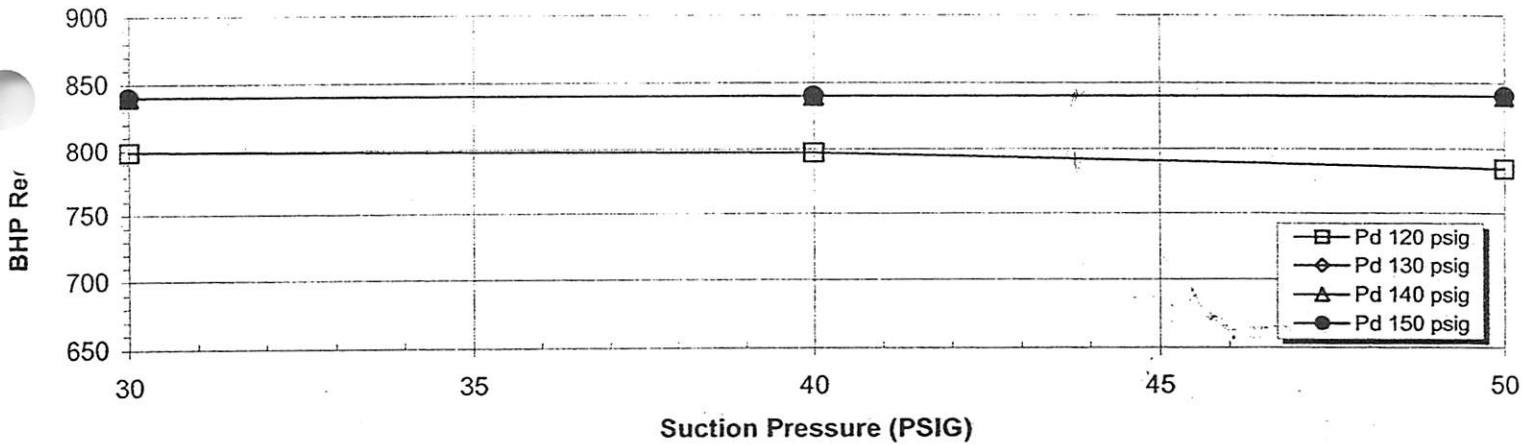

SLIDE VALVE POSITION

